

### DESCRIPTION

The VPT15 series of isolated COTS DC-DC converters is a cost effective solution for many demanding high reliability applications. A wide input voltage range accommodates nominal 28V inputs including avionics, mobile, ground systems, and other applications. Low input and output ripple, fixed operating frequency, and companion EMI filters simplify system design and compliance. A proven design heritage, no optoisolators and a rugged all metal or optional epoxy encapsulated package ensure long term reliability.

The VPT15 series is intended for harsh environments including severe vibration, shock and temperature cycling. Testing is to JESD22, MIL-STD-810, and MIL-STD-883.

These converters are designed and manufactured in a facility certified to ISO9001, J-STD-001 and IPC-A-610.

This product may incorporate one or more of the following U.S. patents:


5,784,266  
5,790,389  
5,963,438  
5,999,433  
6,005,780  
6,084,792  
6,118,673

### FEATURES

- High Reliability at Low Cost
- 15 Watts Output Power
- Wide Input Voltage Range: 15 to 50 Volts per MIL-STD-704 and MIL-STD-1275
- High Input Transient Voltage: 80 Volts for 1 sec per MIL-STD-704A
- Input Undervoltage Lockout
- Fixed Frequency
- Output Soft Start
- Current Limit Protection
- Short Circuit Protection
- Magnetic Feedback, no Optoisolators
- Wide Temperature Range, -55°C to 100°C
- Internally Conformal Coated
- Standard Six Sided Non-Hermetic Rugged Metal Package
- Optional Six Sided Rugged Epoxy Encapsulated Package with Integral Metalized EMI shield that is fully compatible with aqueous cleaning processes
- Meets MIL-STD-461 Revisions C, D, E and F EMC Requirements When Used With VPT's EMI Filters



**Figure 1** – VPT15-2800D DC-DC Converter  
Standard Metal Package

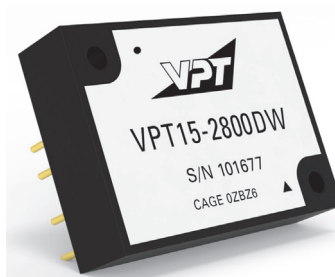

**Figure 2** VPT15-2800DW DC-DC Converter  
Optional Epoxy Encapsulated Package

(Not to Scale)

## SPECIFICATIONS (T<sub>CASE</sub> = -55°C to +100°C, V<sub>IN</sub> = +28V ± 5%, Full Load, Unless Otherwise Specified)

### ABSOLUTE MAXIMUM RATINGS

Input Voltage (Continuous)	50 V <sub>DC</sub>	Junction Temperature Rise to Case	+15°C
Input Voltage (Transient, 1 second)	80 Volts	Storage Temperature	-55°C to +125°C
Output Power <sup>1</sup>	15 Watts	Lead Solder Temperature (10 seconds)	300°C
Power Dissipation (Full Load, T <sub>CASE</sub> = +100°C)	5 Watts	Weight (Maximum)	32 Grams

Parameter	Conditions	VPT15-2805D			VPT15-2812D			Units
		Min	Typ	Max	Min	Typ	Max	
<b>STATIC</b>								
INPUT Voltage <sup>4</sup>	Continuous	15	28	50	15	28	50	V
	Transient, 1 sec	-	-	80	-	-	80	V
Current	Inhibited	-	4	6	-	4	6	mA
	No Load	-	50	65	-	50	65	mA
Ripple Current	Full Load, 20Hz to 10MHz	-	40	75	-	40	75	mA <sub>p-p</sub>
Inhibit Pin Input <sup>4</sup>		0	-	1.5	0	-	1.5	V
Inhibit Pin Open Circuit Voltage <sup>4</sup>		9.0	11.0	13.0	9.0	11.0	13.0	V
UVLO Turn On		12.0	-	14.8	12.0	-	14.8	V
UVLO Turn Off <sup>4</sup>		11.0	-	14.5	11.0	-	14.5	V
OUTPUT Voltage <sup>5</sup>	+V <sub>OUT</sub> T <sub>CASE</sub> = 25°C	4.92	5.00	5.08	11.82	12.00	12.18	V
	+V <sub>OUT</sub> T <sub>CASE</sub> = -55°C to +100°C	4.87	5.00	5.13	11.70	12.00	12.30	V
	-V <sub>OUT</sub> T <sub>CASE</sub> = 25°C	4.87	5.00	5.13	11.70	12.00	12.30	V
	-V <sub>OUT</sub> T <sub>CASE</sub> = -55°C to +100°C	4.82	5.00	5.18	11.58	12.00	12.42	V
Power <sup>3,6</sup>	Total	0	-	15	0	-	15	W
	±V <sub>OUT</sub> Either Output	0	-	10.5	0	-	10.5	W
Current <sup>3,6</sup>	±V <sub>OUT</sub> Either Output	0	-	2.1	0	-	0.88	A
Ripple Voltage	±V <sub>OUT</sub> Full Load <sup>5</sup> , 20Hz to 10MHz	-	20	50	-	20	50	mV <sub>p-p</sub>
Line Regulation	+V <sub>OUT</sub> V <sub>IN</sub> = 15V to 50V	-	1	10	-	1	10	mV
	-V <sub>OUT</sub> V <sub>IN</sub> = 15V to 50V	-	30	150	-	30	150	mV
Load Regulation	+V <sub>OUT</sub> No Load to Full Load <sup>5</sup>	-	1	10	-	1	10	mV
	-V <sub>OUT</sub> No Load to Full Load <sup>5,7</sup>	-	20	100	-	20	100	mV
Cross Regulation	-V <sub>OUT</sub> +Load 70%, -Load 30% +Load 30%, -Load 70%	-	150	400	-	250	500	mV
EFFICIENCY	Full Load <sup>5</sup>	75	80	-	77	80	-	%
LOAD FAULT POWER DISSIPATION	Overload <sup>4</sup>	-	-	8	-	-	8	W
	Short Circuit	-	-	8	-	-	8	W
CAPACITIVE LOAD <sup>4</sup>	Either Output	-	-	500	-	-	500	μF
SWITCHING FREQUENCY		400	500	550	400	500	550	kHz
ISOLATION	500 V <sub>DC</sub>	100	-	-	100	-	-	MΩ
MTBF (MIL-HDBK-217F)	GM @ T <sub>c</sub> = 55°C	-	363	-	-	363	-	kHrs

See notes on next page.



# VPT15-2800D Series

## SPECIFICATIONS (T<sub>CASE</sub> = -55°C to +100°C, V<sub>IN</sub> = +28V ± 5%, Full Load, Unless Otherwise Specified)

### ABSOLUTE MAXIMUM RATINGS

Input Voltage (Continuous)	50 V <sub>DC</sub>	Junction Temperature Rise to Case	+15°C
Input Voltage (Transient, 1 second)	80 Volts	Storage Temperature	-55°C to +125°C
Output Power <sup>1</sup>	15 Watts	Lead Solder Temperature (10 seconds)	300°C
Power Dissipation (Full Load, T <sub>CASE</sub> = +100°C)	5 Watts	Weight (Maximum)	32 Grams

Parameter	Conditions	VPT15-2805D			VPT15-2812D			Units
		Min	Typ	Max	Min	Typ	Max	
<b>DYNAMIC</b>								
Load Step Output Transient ±V <sub>OUT</sub>	Half Load to Full Load	-	120	400	-	140	400	mV <sub>PK</sub>
Load Step Recovery <sup>2</sup>		-	250	450	-	200	500	μSec
Line Step Output Transient <sup>4</sup> ±V <sub>OUT</sub>	V <sub>IN</sub> = 16V to 40V	-	400	700	-	400	900	mV <sub>PK</sub>
Line Step Recovery <sup>2,4</sup>		-	400	700	-	300	500	μSec
Turn On Delay ±V <sub>OUT</sub>	V <sub>IN</sub> = 0V to 28V	-	10	20	-	10	20	mSec
Turn On Overshoot		-	0	25	-	0	50	mV <sub>PK</sub>

- Notes:
1. Dependent on output voltage
  2. Time for output voltage to settle within 1% of its nominal value
  3. Derate linearly at 110°C
  4. Verified by qualification testing
  5. Half load at +V<sub>OUT</sub> and half load at -V<sub>OUT</sub>
  6. Up to 70% of the total power or current can be drawn from either of the two outputs
  7. 5% Load to Full Load at -55°C

## SPECIFICATIONS (T<sub>CASE</sub> = -55°C to +100°C, V<sub>IN</sub> = +28V ± 5%, Full Load, Unless Otherwise Specified)

### ABSOLUTE MAXIMUM RATINGS

Input Voltage (Continuous)	50 V <sub>DC</sub>	Junction Temperature Rise to Case	+15°C
Input Voltage (Transient, 1 second)	80 Volts	Storage Temperature	-55°C to +125°C
Output Power <sup>1</sup>	15 Watts	Lead Solder Temperature (10 seconds)	300°C
Power Dissipation (Full Load, T <sub>CASE</sub> = +100°C)	5 Watts	Weight (Maximum)	32 Grams

Parameter	Conditions	VPT15-2815D			Units	
		Min	Typ	Max		
<b>STATIC</b>						
INPUT Voltage <sup>4</sup>	Continuous	15	28	50	V	
	Transient, 1 sec	-	-	80	V	
Current	Inhibited	-	4	6	mA	
	No Load	-	50	65	mA	
Ripple Current	Full Load <sup>5</sup> , 20Hz to 10MHz	-	40	75	mA <sub>p-p</sub>	
Inhibit Pin Input <sup>4</sup>		0	-	1.5	V	
Inhibit Pin Open Circuit Voltage <sup>4</sup>		9.0	11.0	13.0	V	
UVLO Turn On		12.0	-	14.8	V	
UVLO Turn Off <sup>4</sup>		11.0	-	14.5	V	
OUTPUT Voltage	+V <sub>OUT</sub> T <sub>CASE</sub> = 25°C	14.77	15.0	15.23	V	
	+V <sub>OUT</sub> T <sub>CASE</sub> = -55°C to +100°C	14.62	15.0	15.38	V	
	-V <sub>OUT</sub> T <sub>CASE</sub> = 25°C	14.62	15.0	15.38	V	
	-V <sub>OUT</sub> T <sub>CASE</sub> = -55°C to +100°C	14.47	15.0	15.53	V	
Power <sup>3,6</sup>	Total	0	-	15	W	
	±V <sub>out</sub>	Either Output	0	-	10.5	W
Current <sup>3,6</sup>	±V <sub>OUT</sub>	Either Output	0	-	0.7	A
Ripple Voltage	±V <sub>OUT</sub> Full Load <sup>5</sup> , 20Hz to 10MHz	-	20	50	mV <sub>p-p</sub>	
Line Regulation	+V <sub>OUT</sub> V <sub>IN</sub> = 15V to 50V	-	1	10	mV	
	-V <sub>OUT</sub> V <sub>IN</sub> = 15V to 50V	-	30	150	mV	
Load Regulation	+V <sub>OUT</sub> No Load to Full Load <sup>5</sup>	-	1	10	mV	
	-V <sub>OUT</sub> No Load to Full Load <sup>5,7</sup>	-	20	100	mV	
Cross Regulation	-V <sub>OUT</sub> +Load 70%, -Load 30% +Load 30%, -Load 70%	-	250	500	mV	
EFFICIENCY	Full Load <sup>5</sup>	77	80	-	%	
LOAD FAULT POWER DISSIPATION	Overload <sup>4</sup>	-	-	8	W	
	Short Circuit	-	-	8	W	
CAPACITIVE LOAD <sup>4</sup>	Either Output	-	-	500	μF	
SWITCHING FREQUENCY		400	500	550	kHz	
ISOLATION	500 V <sub>DC</sub>	100	-	-	MΩ	
MTBF (MIL-HDBK-217F)	GM @ T <sub>C</sub> = 55°C	-	363	-	kHrs	

See notes on next page.



# VPT15-2800D Series

## SPECIFICATIONS (T<sub>CASE</sub> = -55°C to +100°C, V<sub>IN</sub> = +28V ± 5%, Full Load, Unless Otherwise Specified)

### ABSOLUTE MAXIMUM RATINGS

Input Voltage (Continuous)	50 V <sub>DC</sub>	Junction Temperature Rise to Case	+15°C
Input Voltage (Transient, 1 second)	80 Volts	Storage Temperature	-55°C to +125°C
Output Power <sup>1</sup>	15 Watts	Lead Solder Temperature (10 seconds)	300°C
Power Dissipation (Full Load, T <sub>CASE</sub> = +100°C)	5 Watts	Weight (Maximum)	32 Grams

Parameter	Conditions	VPT15-2815D			Units
		Min	Typ	Max	
<b>DYNAMIC</b>					
Load Step Output Transient ±V <sub>OUT</sub>	Half Load to Full Load <sup>5</sup>	-	150	400	mV <sub>PK</sub>
Load Step Recovery <sup>2</sup>		-	200	500	μSec
Line Step Output Transient <sup>4</sup> ±V <sub>OUT</sub>	V <sub>IN</sub> = 16V to 40V	-	400	900	mV <sub>PK</sub>
Line Step Recovery <sup>2,4</sup>		-	300	500	μSec
Turn On Delay ±V <sub>OUT</sub>	V <sub>IN</sub> = 0V to 28V	-	10	20	mSec
Turn On Overshoot		-	0	50	mV <sub>PK</sub>

- Notes:
1. Dependent on output voltage
  2. Time for output voltage to settle within 1% of its nominal value
  3. Derate linearly at 110°C
  4. Verified by qualification testing
  5. Half load at +V<sub>OUT</sub> and half load at -V<sub>OUT</sub>
  6. Up to 70% of the total power or current can be drawn from either of the two outputs
  7. 5% Load to Full Load at -55°C

## BLOCK DIAGRAM

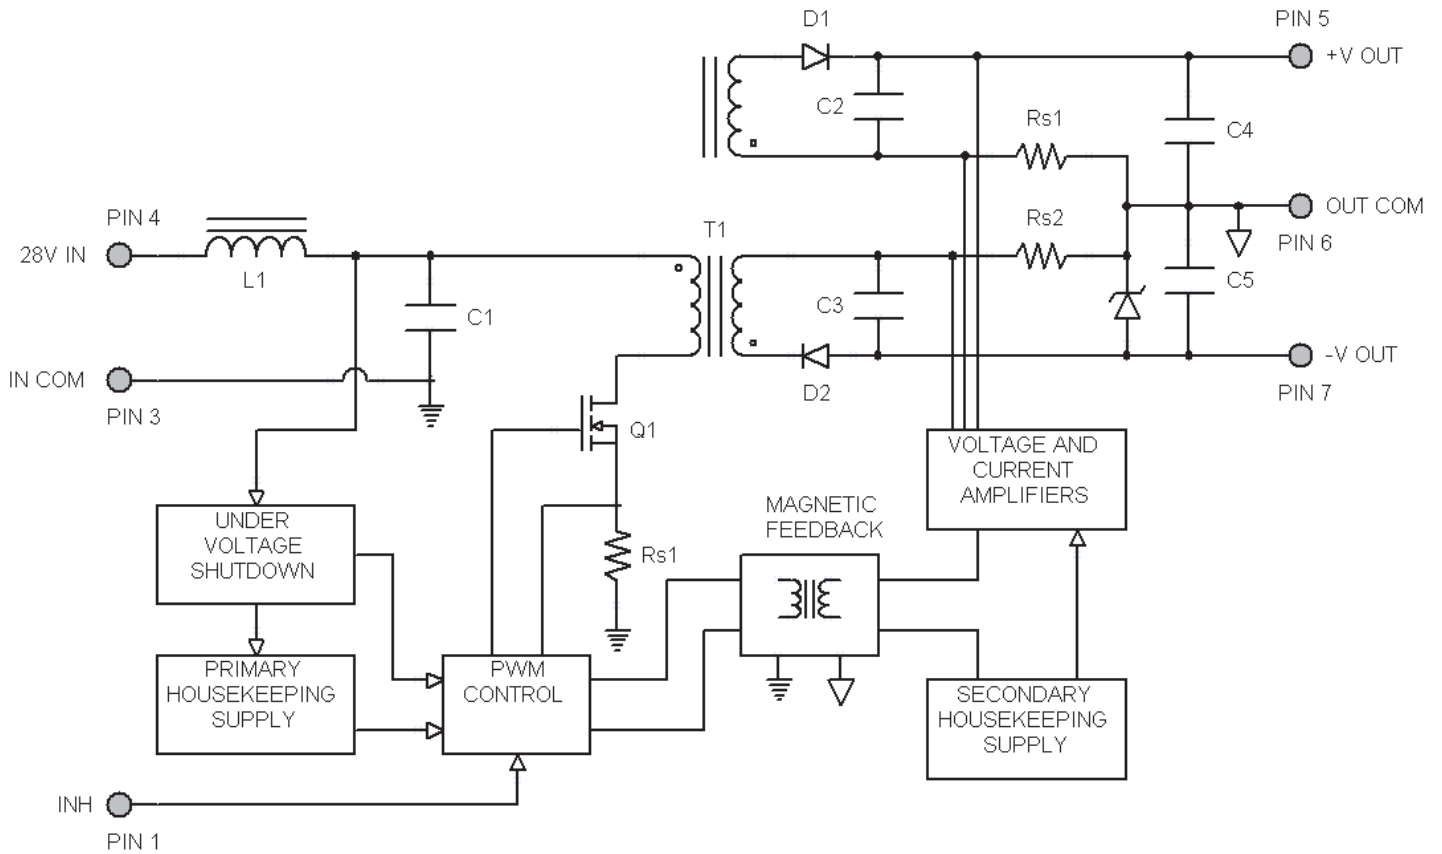


Figure 3

## CONNECTION DIAGRAM



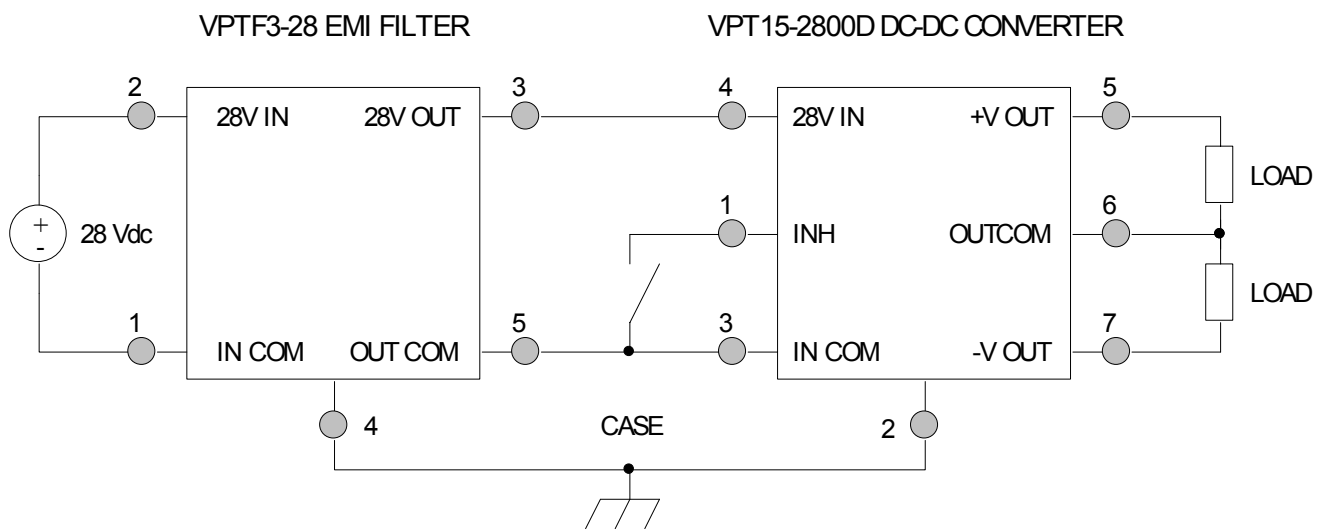


Figure 4  
(Shown with optional EMI filter)

## CONNECTION DIAGRAMS

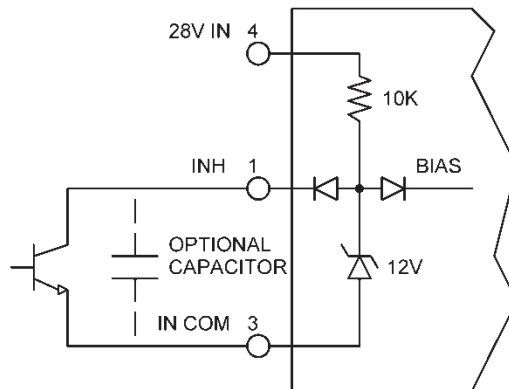


**Figure 5** –Inhibit Circuit  
(Shown with optional capacitor for turn-on delay)

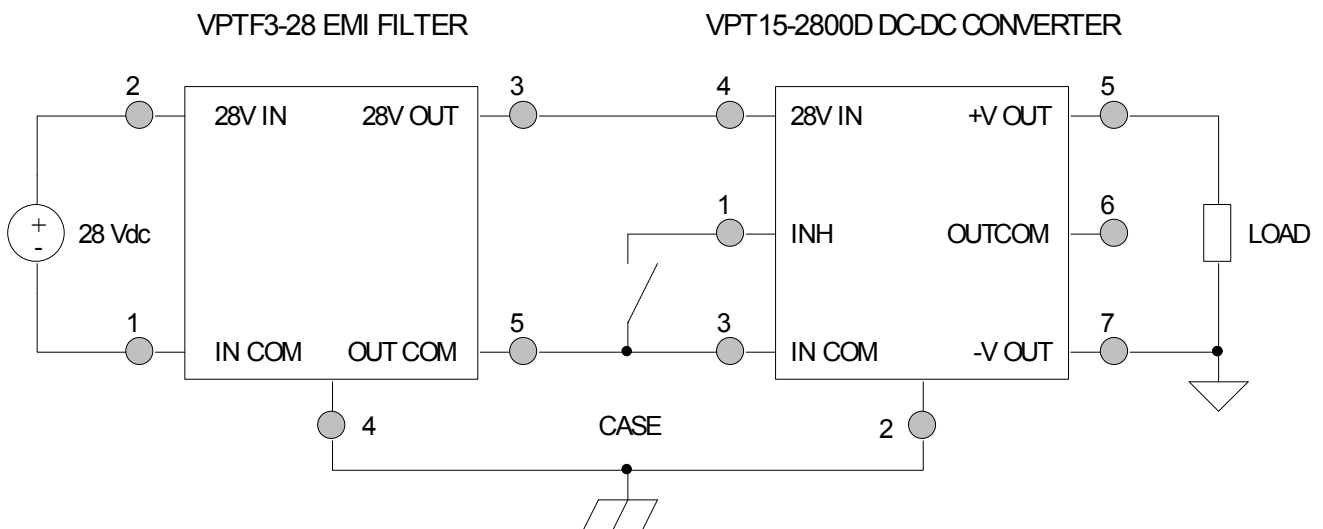


**Figure 6** – Stacked Output Connection  
(Shown with optional EMI filter)


## EFFICIENCY PERFORMANCE CURVES ( $T_{CASE} = 25^{\circ}C$ , Full Load, Unless Otherwise Specified)

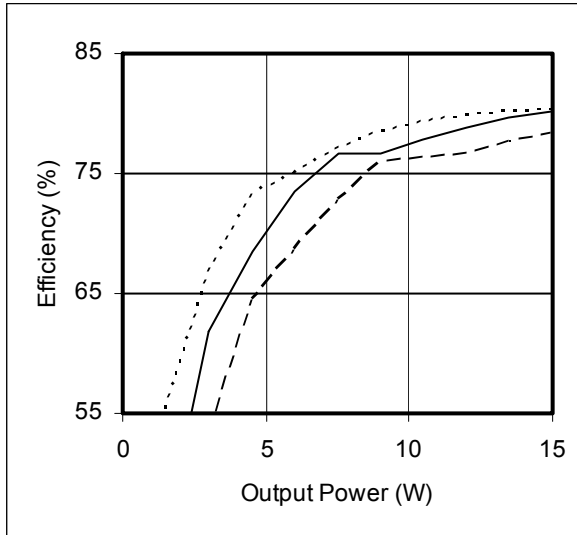

**Figure 7** – VPT15-2805D  
Efficiency (%) vs. Output Power (W)

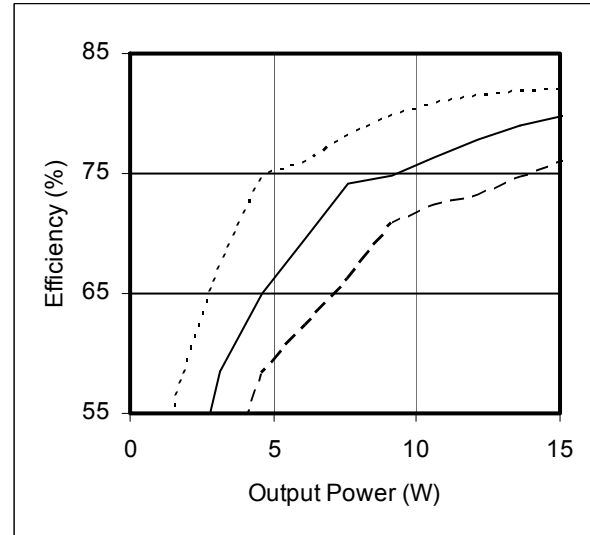



**Figure 8** – VPT15-2812D  
Efficiency (%) vs. Output Power (W)

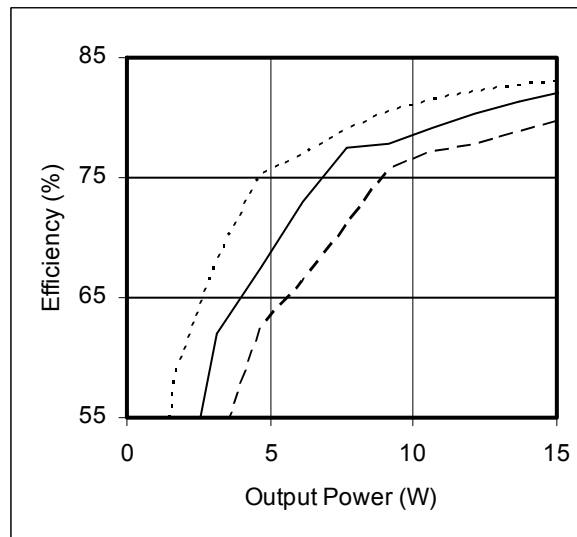


**Figure 9** – VPT15-2815D  
Efficiency (%) vs. Output Power (W)




## CROSS REGULATION CURVES ( $T_{CASE} = 25^{\circ}C$ , Full Load, Unless Otherwise Specified)

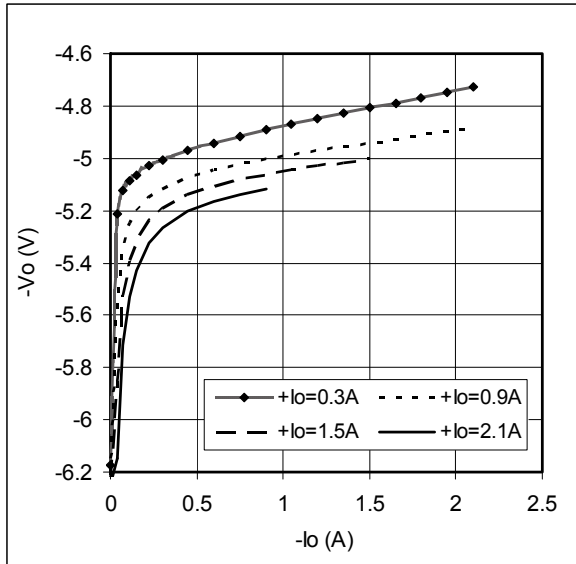

**Figure 10 – VPT15-2805D**  
-Vout (V) vs. -Iout (A)

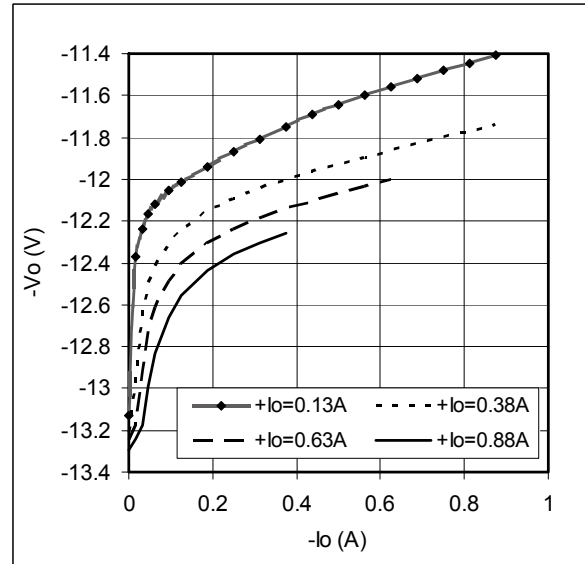





**Figure 11 – VPT15-2812D**  
-Vout (V) vs. -Iout (A)

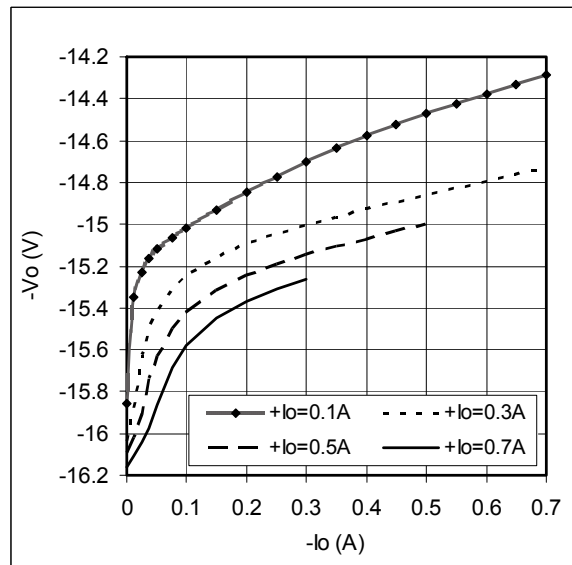

**Figure 12 – VPT15-2815D**  
-Vout (V) vs. -Iout (A)





## EMI PERFORMANCE CURVES

( $T_{CASE} = 25^{\circ}C$ ,  $V_{IN} = +28V \pm 5\%$ , Full Load, Unless Otherwise Specified)

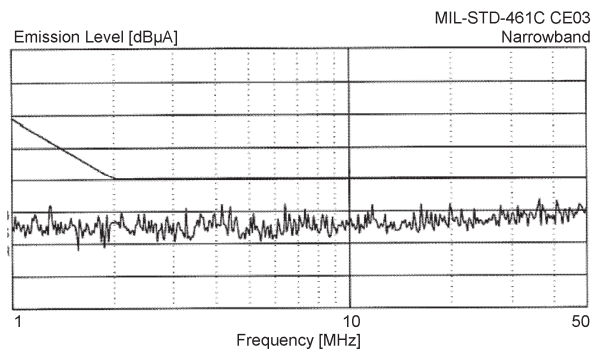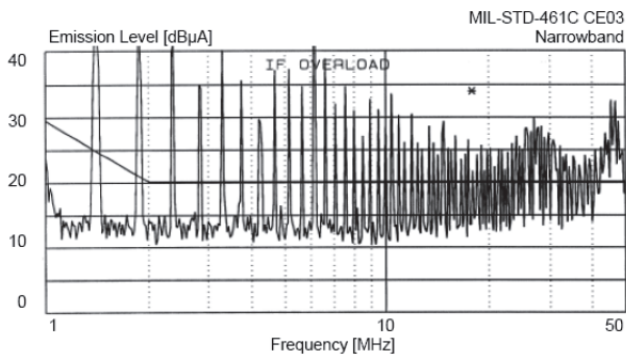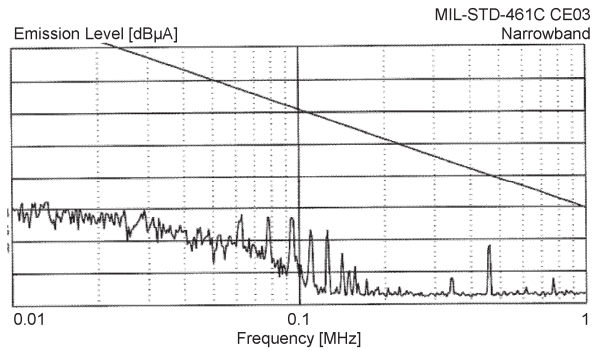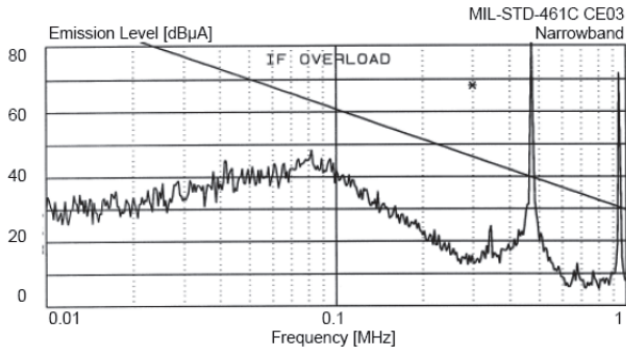

**Figure 13** – VPT15-2800D without EMI Filter



**Figure 14** – VPT15-2800D with VPTF Series EMI Filter

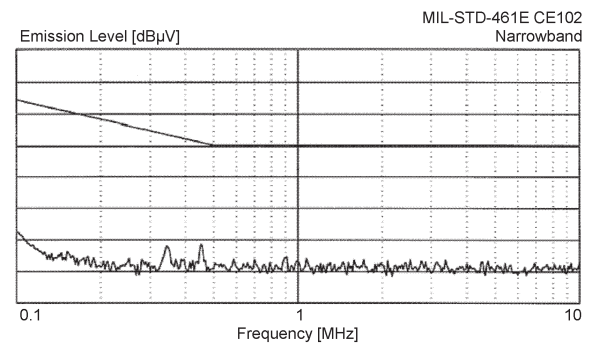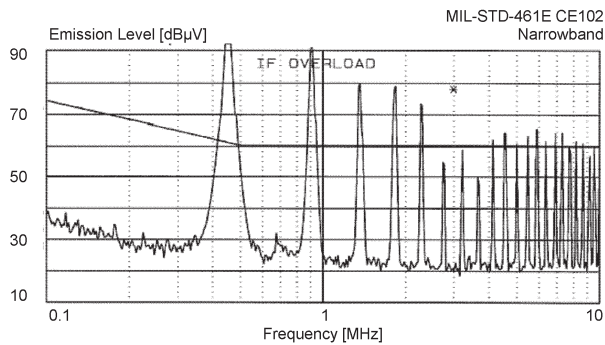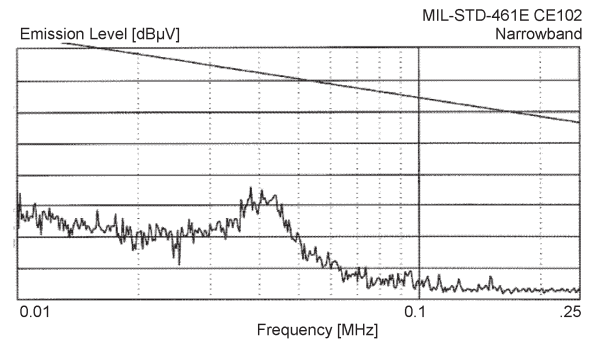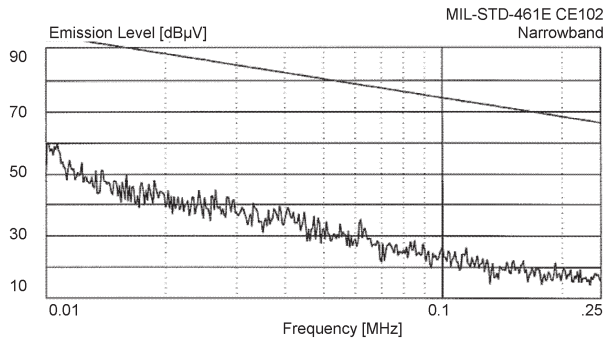

**Figure 15** – VPT15-2800D without VPTF Series EMI Filter

**Figure 16** – VPT15-2800D with VPTF Series EMI Filter

## STANDARD METAL PACKAGE

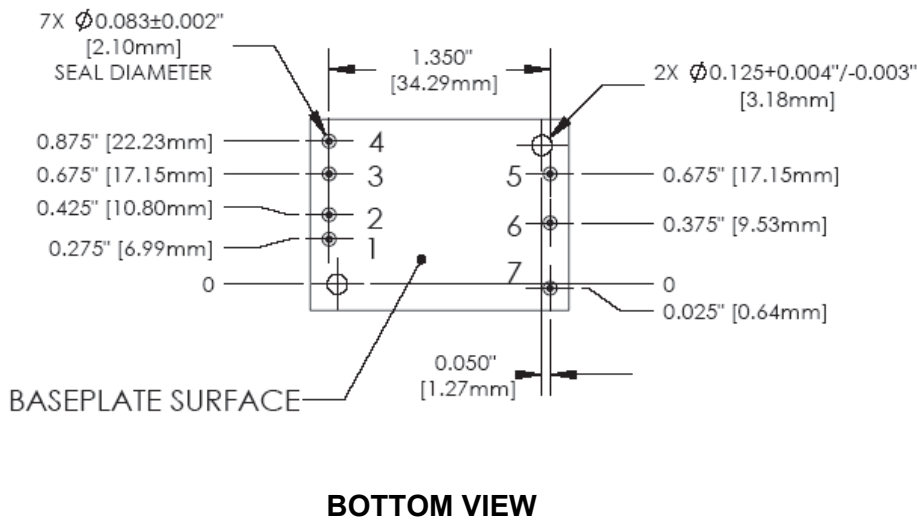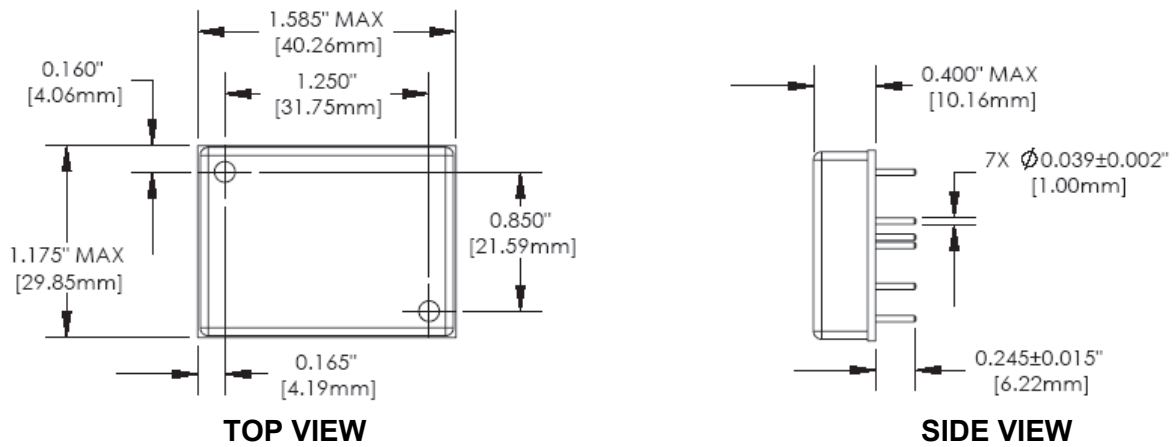


Pin	Function
1	INHIBIT
2	CASE
3	INCOM
4	28VIN
5	+VOUT
6	OUTCOM
7	-VOUT

**Figure 17 – Package and Pinout**  
(Dimensional Limits are  $\pm 0.005$ " Unless Otherwise Stated)

### Package Notes

- Case temperature is measured on the center of the baseplate surface.
- Materials: Baseplate – aluminum, conductive conversion coating.  
Cover – nickel plated.  
Pins - copper, gold over nickel plating.
- Mounting holes are not threaded. Recommended fastener is 4-40.
- This Package is not hermetic. VPT offers a wide range of hermetic products. Please contact VPT for details if hermetic products are required.

## OPTIONAL EPOXY ENCAPSULATED PACKAGE

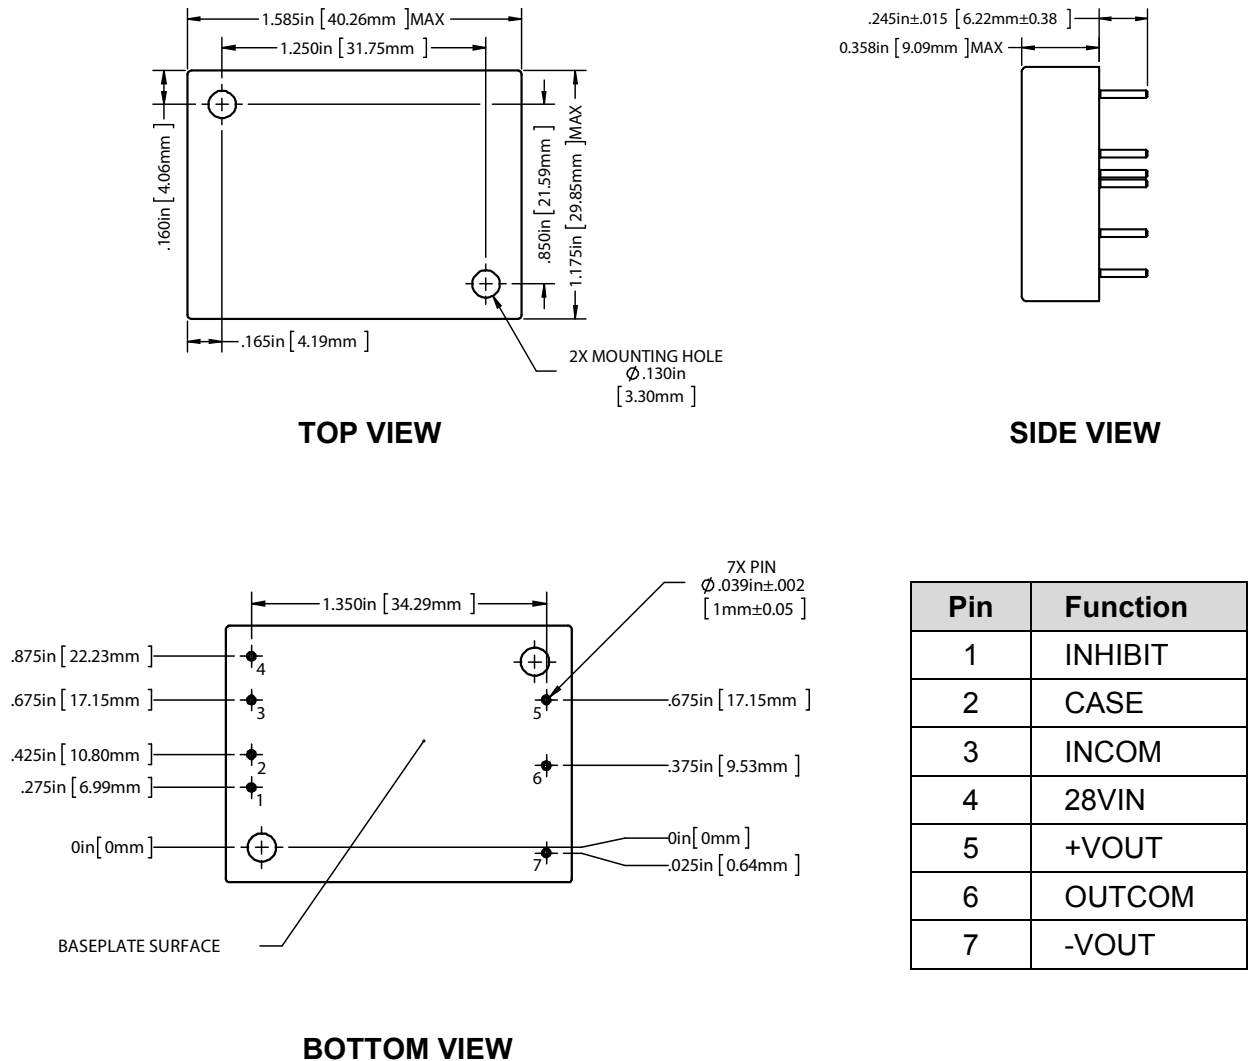

**Figure 18 – Package and Pinout**  
(Dimensional Limits are  $\pm 0.005$ " Unless Otherwise Stated)

### Package Notes

1. Case temperature is measured on the center of the baseplate surface.
2. Materials: Body - epoxy with integral metalized EMI shield.  
Pins - copper, gold over nickel plating.
3. Mounting holes are not threaded. Recommended fastener is 4-40.
4. This package is highly resistant to chemical, solvent and salt environments and is fully compatible with high volume manufacturing processes including wave solder, cleaning solvents, high pressure sprays and aqueous wash processes.

## PACKAGE PIN DESCRIPTION

Pin	Function	Description
1	INHIBIT	This is an open collector input. Logic Low = Disabled Output. Connect the inhibit pin to input common to disable the output. Unconnected, open collector or open drain = Enabled Output.
2	CASE	Case Connection.
3	INCOM	Input Return Connection.
4	28VIN	Positive Input Voltage Connection.
5	+VOUT	Positive Output Voltage Connection.
6	OUTCOM	Output Return Connection.
7	-VOUT	Negative Output Voltage Connection.

## 100% ENVIRONMENTAL SCREENING

Screening	Condition
Internal Visual	IPC-A-610, Class 3
Stabilization Bake	MIL-STD-883, Method 1008, Condition B, 125°C, 24 hours
Temperature Cycling	MIL-STD-883, Method 1010, Condition B, -55°C to +125°C, 10 Cycles
Burn-In	96 hours at +100°C
Final Electrical	100% at 25°C
External Visual	Internal Procedure

## ORDERING INFORMATION

VPT15-	28	05	D	W
1	2	3	4	5

(1) Product Series	(2) Nominal Input Voltage		(3) Output Voltage		(4) Number of Outputs		(5) Package Option	
VPT15-	28	28 Volts	05 12 15	±5 Volts ±12 Volts ±15 Volts	D	Dual	None W	Standard Metal Epoxy Encapsulated

## CONTACT INFORMATION

To request a quotation or place orders please contact your sales representative or the VPT Inc. Sales Department at:

**Phone:** (425) 353-3010  
**Fax:** (425) 353-4030  
**E-mail:** [vptsales@vptpower.com](mailto:vptsales@vptpower.com)

All information contained in this datasheet is believed to be accurate, however, no responsibility is assumed for possible errors or omissions. The products or specifications contained herein are subject to change without notice. VPT, its logo and tagline are registered trademarks in the U.S. Patent and Trademark Office.