2N2218, A, AL & 2N2219, A, AL

NPN Switching Silicon Transistor



Rev. V2

Features

- Available in JAN, JANTX, JANTXV and JANS per MIL-PRF-19500/251
- TO-5 & TO-39 (TO-205AD) Package

Electrical Characteristics

Parameter	Test Conditions Part #		Units	Min.	Max.	
Off Characteristics:						
Collector - Emitter Breakdown Voltage	I _E = 10 mA	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL	Vdc	30 50	_	
Emitter - Base Cutoff Current	V _{EB} = 5 V V _{EB} = 6 V V _{EB} = 4 V	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL All types	µAdc nAdc		10 10 10	
Collector - Emitter Cutoff Current	V _{CE} = 30 V V _{CE} = 50 V	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL	nAdc	_	10	
Collector - Base Cutoff Current	$V_{CB} = 50 V$ $V_{CB} = 60 V$ $V_{CB} = 60 V$ $V_{CB} = 75 V$	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL 2N2218; 2N2219 2N2218A/AL; 2N2219A/AL	nAdc nAdc µAdc µAdc		10 10 10 10	
On Characteristics ¹ :						
Forward Current Transfer Ratio	I _C = 0.1 mA, V _{CE} = 10 V	2N2218 2N2219 2N2218A/AL 2N2219A/AL		20 35 30 50	 	
	I _C = 1 mA, V _{CE} = 10 V	2N2218 2N2219 2N2218A/AL 2N2219A/AL		25 50 35 75	150 325 150 325	
	I _C = 10 mA, V _{CE} = 10 V	2N2218 2N2219 2N2218A/AL 2N2219A/AL		35 75 40 100	 	
	I_{C} = 150 mA, V_{CE} = 10 V	2N2218/A/AL 2N2219/A/AL			120 300	
	$I_{\rm C}$ = 500 mA, $V_{\rm CE}$ = 10 V	2N2218/A/AL 2N2219/A/AL		20 30	_	
Collector - Emitter Saturation Voltage	I _C = 150 mA, I _B = 15 mA	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL		_	0.4 0.3	
	I _C = 500 mA, I _B = 50 mA 2N2218; 2N2219 2N2218A/AL; 2N2219A/AL		Vdc	—	1.6 1.0	

1. Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2.0%.

VPT Components and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.vptcomponents.com</u> for additional data sheets and product information.

2N2218, A, AL & 2N2219, A, AL

NIDNI	A 14 1 1	0 '''	
NUN	Switchin	a Silicon	Iraneletor
	OWILCIIII		Transistor



Rev. V2

Electrical Specifications @ T_A = 25°C

Parameter	Test Conditions Part #		Units	Min.	Max.	
On Characteristics ¹ :						
Base - Emitter Saturation Voltage	I _C = 150 mA, I _B = 15 mA	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL	Vdc	0.6 0.6	1.3 1.2	
	I _C = 500 mA, I _B = 50 mA	2N2218; 2N2219 2N2218A/AL; 2N2219A/AL			2.6 2.0	
Dynamic Characteristics:						
Small-Signal Short-Circuit, Forward Current Transfer Ratio	I _C = 1 mA, V _{CE} = 20 V, 1 kHz	2N2218 2N2219 2N2218A, AL 2N2219A, AL		25 50 35 75	_	
Magnitude of Small-Signal Short-Circuit, Forward Current Transfer Ratio	I _C = 20 mA, V _{CE} = 20 V, 100 MHz	_		2.5	12	
Output Capacitance	V _{CB} = 10 V, I _E = 0, 100 kHz ≤ f ≤ 1 MHz	_	pF	_	8	
Input Capacitance	$V_{EB} = 0.5 \text{ V}, I_C = 0,$ 100 kHz $\leq f \leq 1 \text{ MHz}$		pF	_	25	
Switching Characteristics ² :						
Turn-On Time	V_{CC} = 30 V, I _C = 150 mA, I _{B1} = 15 mA	2N2218, 2N2219 2N2218A, AL, 2N2219A, AL	ns		40 35	
Turn-Off Time	V _{CC} = 30 V, I _C = 150 mA, I _{B1} = 15 mA	2N2218, 2N2219 2N2218A, AL, 2N2219A, AL	ns	_	250 300	

2. For Turn-On time see figure 3, and for Turn-Off time see figure 4 of MIL-PRF-19500/251.

Absolute Maximum Ratings @ T_c = 25°C

Parameter	2N2218 & 2N2219	2N2218A; AL & 2N2219A; AL	
Collector - Emitter Voltage	30 Vdc	50 Vdc	
Collector - Base Voltage	60 Vdc	75 Vdc	
Emitter - Base Voltage	5 Vdc	6 Vdc	
Collector Current	800 mA		
Total Power Dissipation ^{3,4} $T_A = +25^{\circ}C$ $T_C = +25^{\circ}C$	0.8 W 3.0 W		
Thermal Resistance, Junction to Case	50°C/W		
Operating & Storage Temperature	-55°C to +200°C		

3. Derate linearly 4.6 mW/°C above $T_A > +25^{\circ}C$. 4. Derate linearly 17.0 mW/°C above $T_C > +25^{\circ}C$.

VPT Components and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.vptcomponents.com for additional data sheets and product information.

²


2N2218, A, AL & 2N2219, A, AL

NPN Switching Silicon Transistor



Rev. V2

Outline Drawing (TO-5 & TO-39)

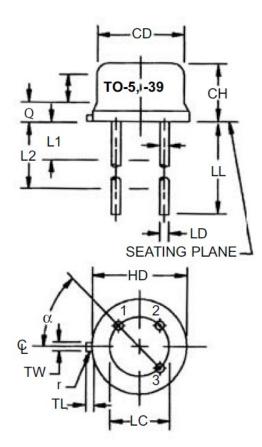

	Dimensions					
LTR	Inches		Millimeters		Note	
	Min.	Max.	Min.	Max.		
CD	0.305	0.335	7.75	8.51		
СН	0.240	0.260	6.10	6.60	_	
HD	0.335	0.370	8.51	9.40	_	
LC	0.200 TP		5.08 TP		7	
LD	0.016	0.019	0.41	0.48	8, 9	
LL	See note 14					
LU	0.016	0.019	0.41	0.48	8, 9	
L1	_	0.050		1.27	8, 9	
L2	0.250	_	6.35		8, 9	
Р	0.100	_	2.54	_	7	
Q	—	0.030	—	0.76	5	
TL	0.029	0.045	0.74	1.14	3, 4	
ΤW	0.028	0.034	0.71	0.86	3	
r	_	0.010	_	0.25	10	
α	45° TP		45° TP		7	

- 1. Dimensions are in inches.
- 2. Millimeters are given for general information only.
- 3. Beyond r (radius) maximum, TW shall be held for a minimum length of .011 (0.28 mm).
- 4. Dimension TL measured from maximum HD.
- 5. Body contour optional within zone defined by HD, CD, and Q.
- CD shall not vary more than 0.010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
 Leads at gauge plane 0.054 +0.001 –0.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within 0.007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods or by gauging procedure.
- 8. Dimension LU applies between L, and L, Dimension LD applies between L, and LL minimum. Diameter is uncontrolled in and beyond LL minimum.
- 9. All three leads.
- 10. The collector shall be internally connected to the case.
- 11. Dimension r (radius) applies to both inside corners of tab.
- 12. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.
- 13. Lead 1 = emitter, lead 2 = base, lead 3 = collector.
- 14. For non-S-suffix devices (T0-5), dimension LL = 1.5 inches (38.10 mm) min. and 1.75 inches (44.45 mm) max. For S-suffix types (T0-39), dimension LL = 0.5 inch (12.70 mm) min. and 750 inch (19.05 mm) max.

³

VPT Components and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.vptcomponents.com for additional data sheets and product information.

2N2218, A, AL & 2N2219, A, AL

NPN Switching Silicon Transistor



VPT Components All rights reserved.

Information in this document is provided in connection with VPT Components' products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components' Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS' PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components' products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components' customers using or selling VPT Components' products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.

4

VPT Components and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.vptcomponents.com</u> for additional data sheets and product information.